

## Myron E - Diffuser

Diffusion  
PRO AUDIO & STUDIO

### Description

In spaces like recording control rooms, sound mastering rooms or other high fidelity listening environments where the sound quality is critical, controlling the bandwidth of diffusion is a priority. Myron E Diffuser was conceived and developed by Artnovion with a specific technical advantage, which allows it to perform way beyond what most of other sound diffusing products are able to deliver. This EPS panel is available in 3 different colours, and is especially easy to install.

### Specifications

Acoustic performance:

Scattering range | 630Hz to 6300Hz

FG | 595x595x150 mm

Finishing Material:


MDF Lacquer - FG (Furniture grade)

Click on a certain finish for more detailed information


Installation:

Glueart | FixArt Foam

### Technical Information

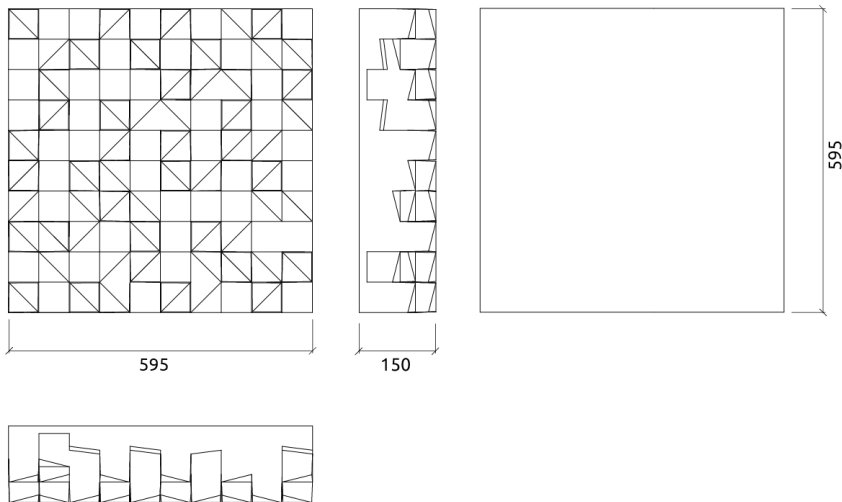

### Performance

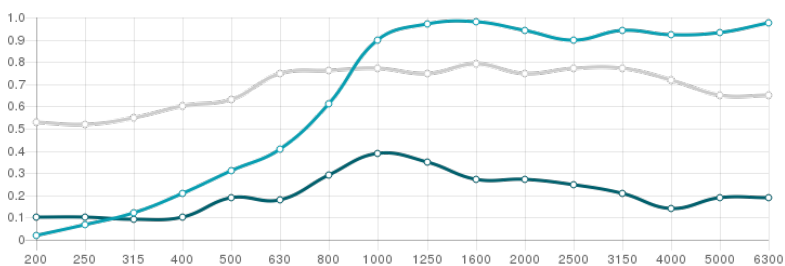

hello@artnovion.com

www.artnovion.com

27/02/2019

## Myron E - Diffuser

Diffusion  
PRO AUDIO & STUDIO

### Specifications

Acoustic performance:

Scattering range | 630Hz to 6300Hz

FG | 595x595x150 mm


Finishing Material:

MDF Lacquer - FG (Furniture grade)



Click on a certain finish for more detailed information

Installation:

Glueart | FixArt Foam

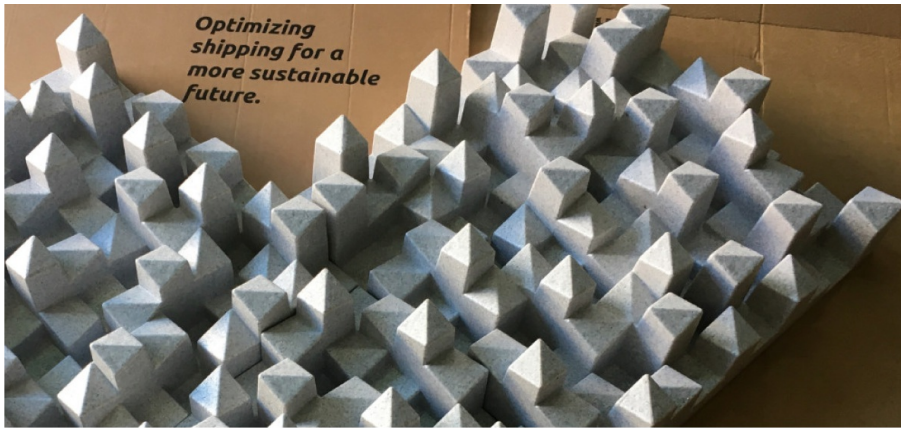

### Myron E Diffuser



Diffuser



### Fixing System



GlueArt

### Product finishes

(FG) Product Fire Grade - Furniture Grade



FG | (E01) Grigio



FG | (E02) Bianco



FG | (E03) Nero



hello@artnovion.com

www.artnovion.com

27/02/2019